

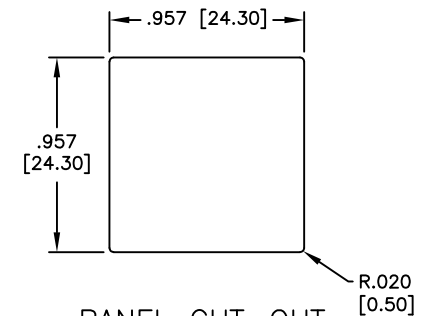

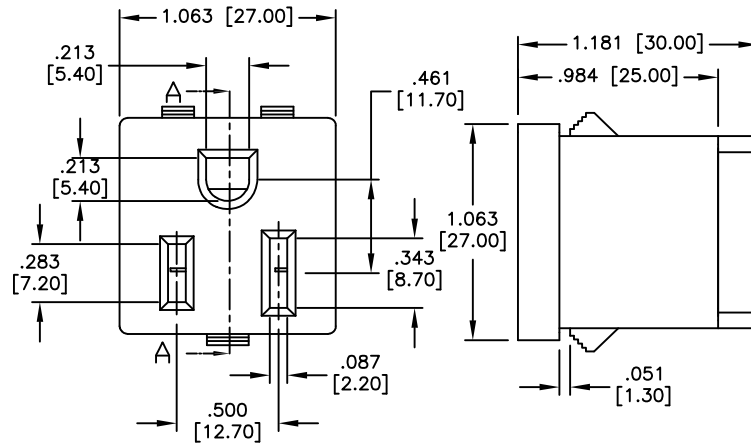


APPROVED: _____
DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/19/05	
A		REVISED SHAPE & DIM.	2/18/14	AY/KW
B		CHG'D CONTACT MATERIAL TO BRASS	10/17/16	AY/KW
C		CHG'D MTL TO C2680, EH, Hardness: HV 183	11/24/16	AY/KW



PANEL CUT-OUT
Panel Thickness:
0.8mm to 1.5mm



SECTION A-A

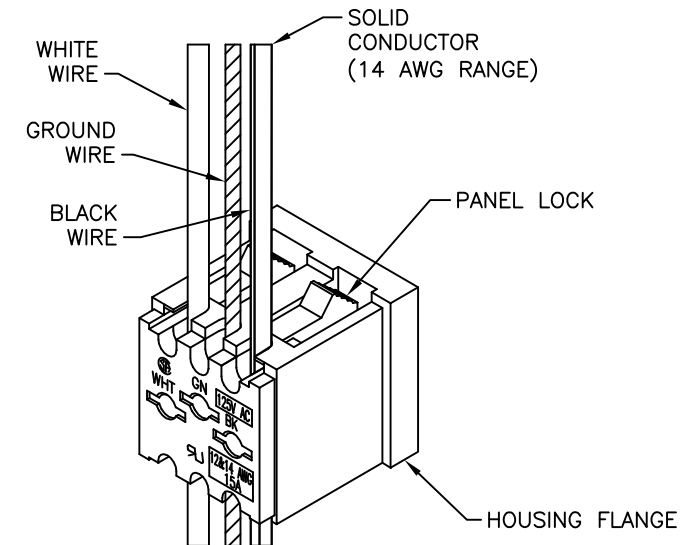

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL94V-0

Insulator color: Black

Contacts: Brass, C2680, Level: EH, Hardness: HV 183, Tin plated

Electrical:

Operating voltage: (C-ULus) 125 VAC

Current rating: (C-ULus) 15 Amps max.

Insulation resistance: 100 Mohms min. @ 500 VDC

Dielectric withstanding voltage: 3,000 VAC for 1 minute

Recommended wire size: 14 AWG solid

Environmental:

Lead free, RoHS Compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	SS	1/19/05
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE		
NEMA UNIVERSAL PANEL SNAP RECEPTACLE		
SIZE X	PART NO. NEMA-5-3	REV. C
REF: S00087C	SCALE: NTS	SHEET 1 OF 1