

M-Series Pushbutton Switches

Approvals:

Pending

Contact Rating

10A 125/250 VAC

1/4 HP 125 VAC

10A 14 VDC

Contact Material

Fine Silver

Dielectric Strength

2000 VAC RMS

Life

25,000 operations at max. rating - 100,000 mechanical

Terminals

3/16" quick-connect or .050 x .031 p.c.



Lamps

6, 12 and 28 volt incandescent lamps.

125 and 250 volt neon lamps.

6 or 12 volt LED's.

Circuit	Switching	Circuit Diagram (Lighted)	Circuit Diagram (Non-Lighted)
1	Single-Pole Single-Throw Normally Open		
3	Double-Pole Single-Throw Normally Open	N/A	
6	Single-Pole Single-Throw Normally Open		N/A
7	Double-Pole Single-Throw Normally Open		N/A
D	Indicator Light Only		N/A

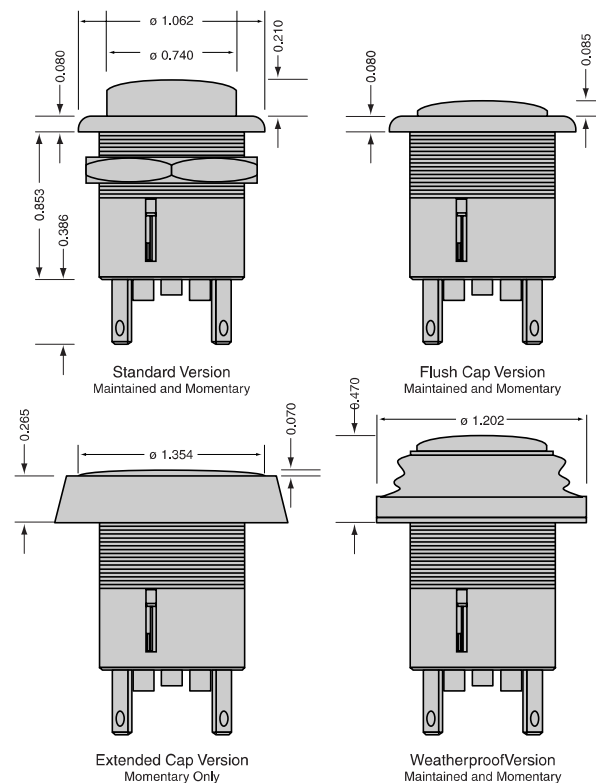

Ordering Information:

M

Style

S=Standard
F=Flush
W=Weatherproof
E=Extended

Illumination

L=Lighted
P=Non-Lighted

Action

A=Alternate
M=Momentary
G=Indicator Only

Circuit

1=SPST
3=DPST
6=SPST with Lamp
7=DPST with Lamp
0=Indicator Only

Terminal

B=3/16" Quick Connect
G=Gold Plated

Lamp or LED Voltage

6V=6 Volt Incandescent
12V=12 Volt Incandescent
28V=28 Volt Incandescent
125V= 125 Volt Neon
125VG=125 Volt Green Neon
250V=250 Volt Neon
250VG=250 Volt Green Neon
2VR=2 Volt Red LED
2VG=2 Volt Green LED
2VA=2 Volt Amber LED
6VR=6 Volt Red LED
6VG=6 Volt Green LED
6VA=6 Volt Amber LED
12VR=12 Volt Red LED
12VG=12 Volt Green LED
12VA=12 Volt Amber LED

Lens

1=Red
2=Clear
3=Amber
4=Green
5=Blue
6=Translucent
7=Opaque White
9=Opaque Black
12=Opaque Red

Body

Matte Finish
M9=Black
(For other colors contact factory)



Phone (203) 272-2794 • Fax (203) 272-3492 • <http://www.osloswitch.com>

MADE IN U.S.A.



Phone (203) 272-2794 • Fax (203) 272-3492 • <http://www.osloswitch.com>

MADE IN U.S.A.