

6

5

4

3





2

1


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/5/21	

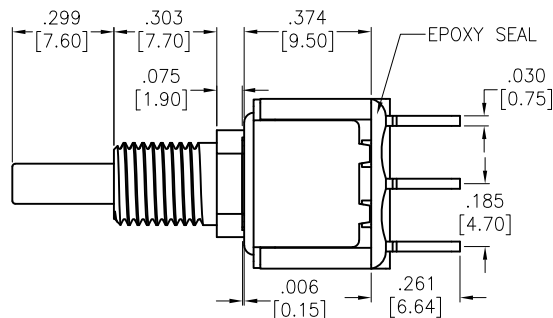

RECOMMENDED PCB LAYOUT

CIRCUIT DIAGRAM
(DPDT) ON-ON

SPECIFICATIONS:

Material:

Movable Contact: Copper Alloy, Silver Plated

Terminal: Copper Alloy, Silver Plated

Electrical:

Rating:

6 Amps with resistive load @ 125VAC or 28VDC

3 Amps with resistive load @ 250VAC

Contact resistance: 10 mΩ max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500V RMS @Sea level

Temperature Rating:

Operating temperature: -30°C to +85°C

Environmental:

Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DATE

DRAWN	WX	3/5/21
CHECKED	AC	3/5/21
APPROVED		

ADAM
TECH909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

PUSHBUTTON SWITCH, ON-ON, DPDT
COPPER ALLOY SILVER PLATED, PCB TYPE

SIZE

X

PART NO.

SW-PB8-BA00A2QE-3

REV.

-

REF: S00198T

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1