

Directional Coupler, 0.5-20GHz, 20dB, SMA Female

WMC-0.5-20-20dB-S

Description

Model WMC-0.5-20-20dB-S from Werbel Microwave is a directional coupler that covers 500 MHz to 20 GHz with broadband flat coupling response, high directivity, and excellent return loss performance. Many military and telecom bands are covered within a single, small size enclosure. Extremely flat ± 0.6 dB typical coupling passband ripple makes for high accuracy and low signal degradation in AGC loops and sensing applications. From upper UHF to lower K bands. Designed, assembled and tested in USA.

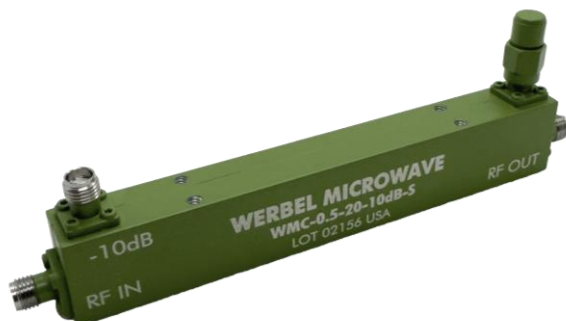


Photo is representative.

Specifications	Min.	Typ.	Max.	Units
Frequency	500	--	20000	MHz
Impedance	--	50	--	Ohm
Coupling	--	20 \pm 1.2	--	dB
Frequency Sensitivity (Flatness)	--	± 0.6	± 1.8	dB
Mainline Loss ¹	--	1.1	1.7	dB
Directivity	11	17	--	dB
Isolation	--	37	--	dB
Main Line Return Loss	13	16	--	dB
Secondary Line Return Loss	12	14	--	dB
Input Power (CW) ²	--	--	20	Watts

Mechanical



Connector Interface	SMA-Female
Operating Temperature ³	-55 to +85 °C
Storage Temperature	-55 to +100 °C
Weight	3.5 oz (86 g)
Humidity	10-90% non-condensing
Environment	Indoors Use Only



1. Mainline loss includes coupled loss.
2. All output ports should be terminated in a 50-ohm load with 1.2:1 max VSWR.
3. Electrical specifications at +25 °C only.
4. To the best of our knowledge at the time of publication.

Materials



RoHS and REACH Compliant ⁴	
Enclosure	Aluminum
Connectors	Stainless Steel
Contacts	Be Cu, Gold Plated
Insulators	PTFE
Finish	Green Paint



Typical Performance at +25 °C

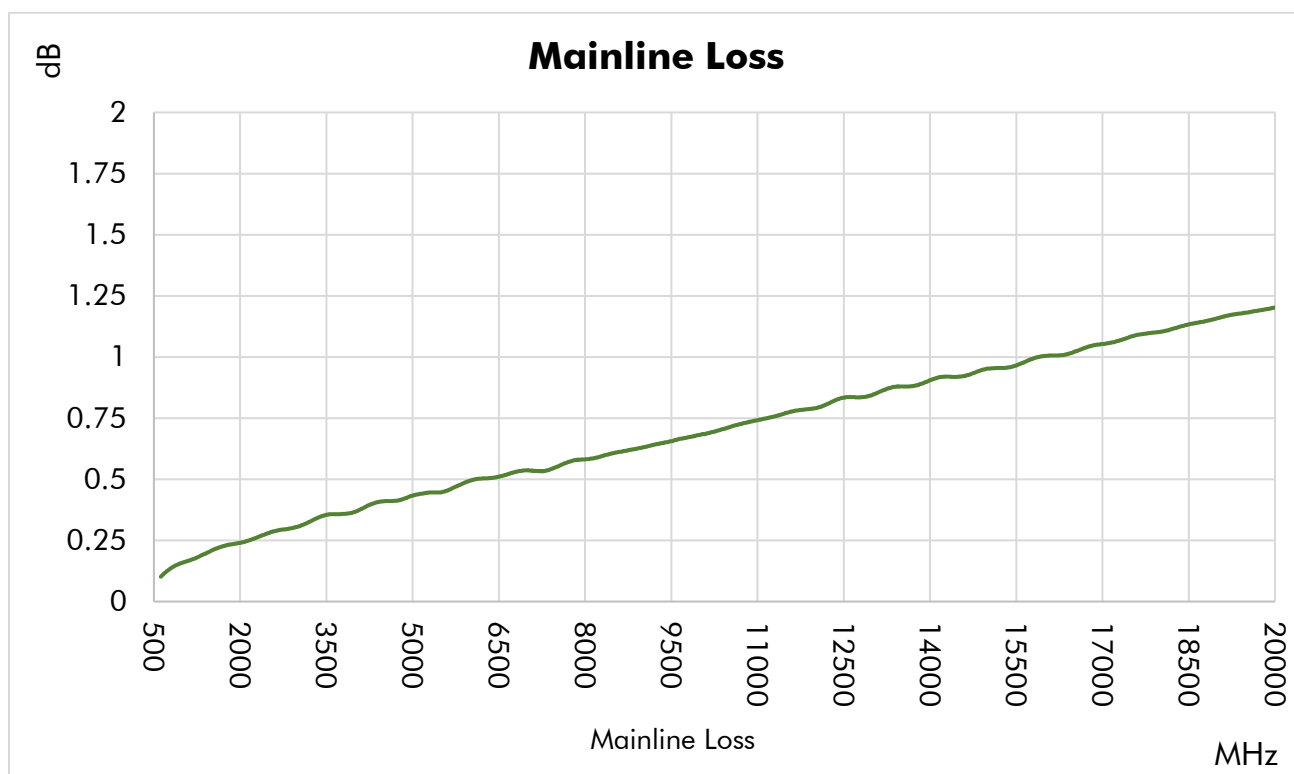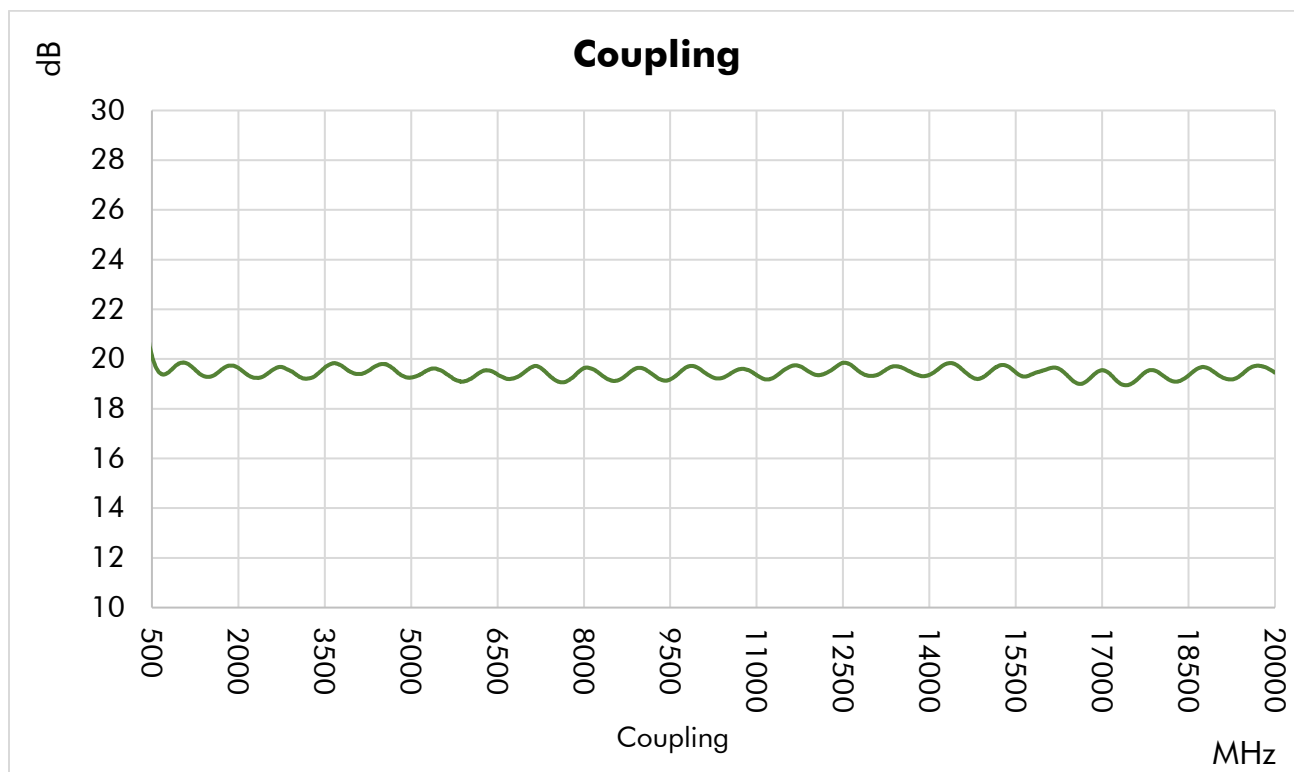

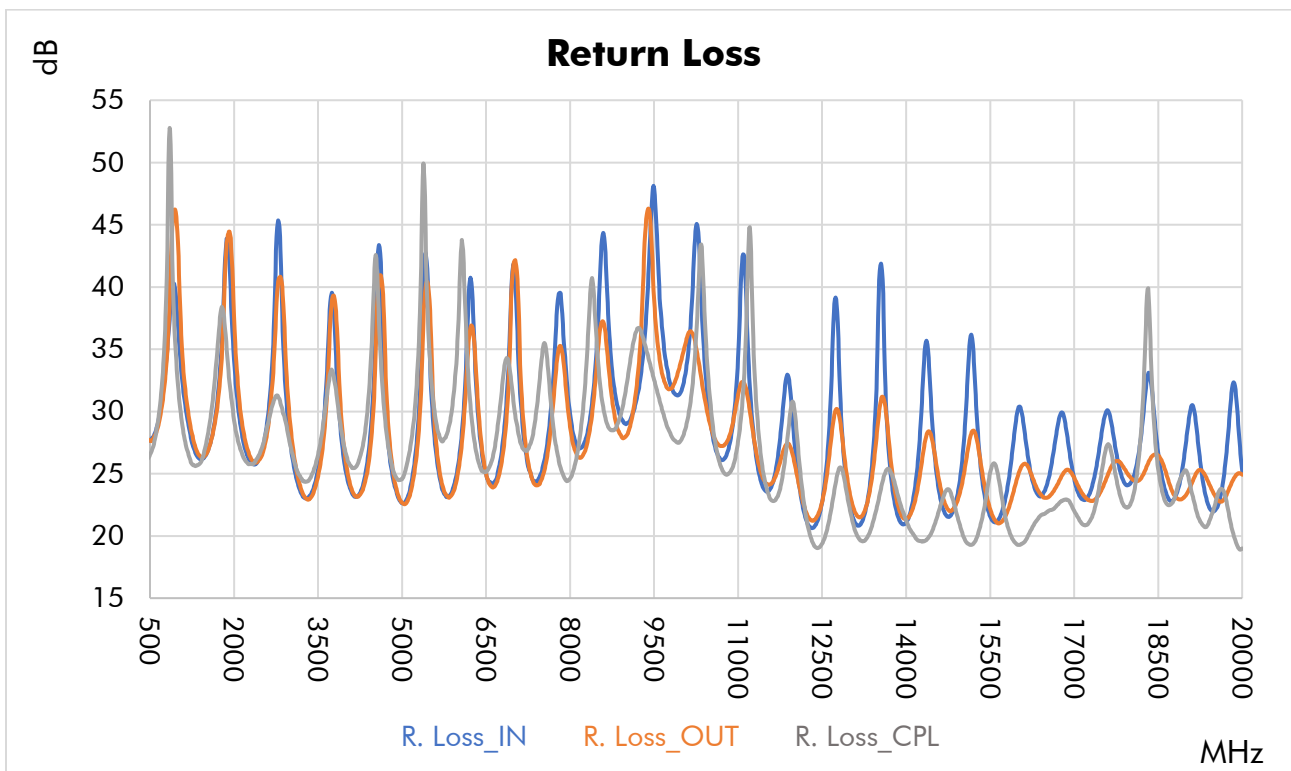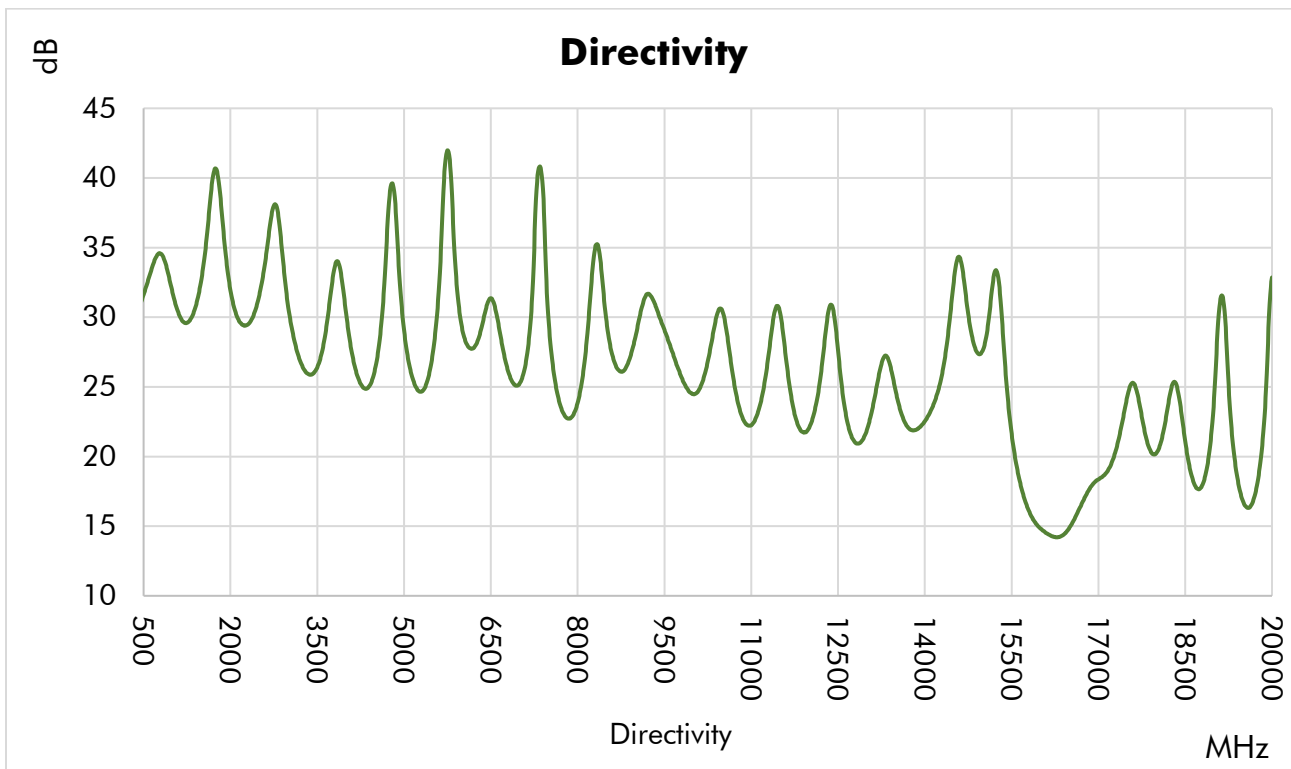

Typical Performance Over Temperature

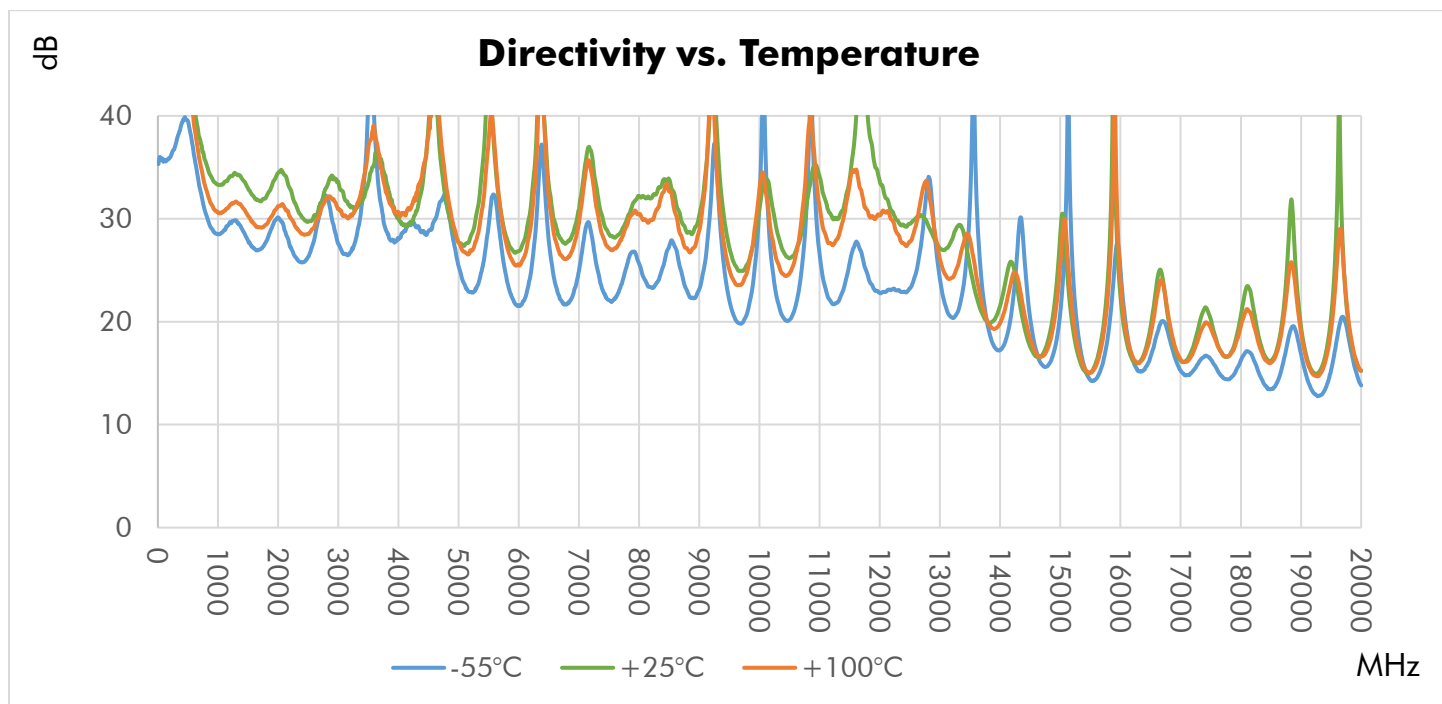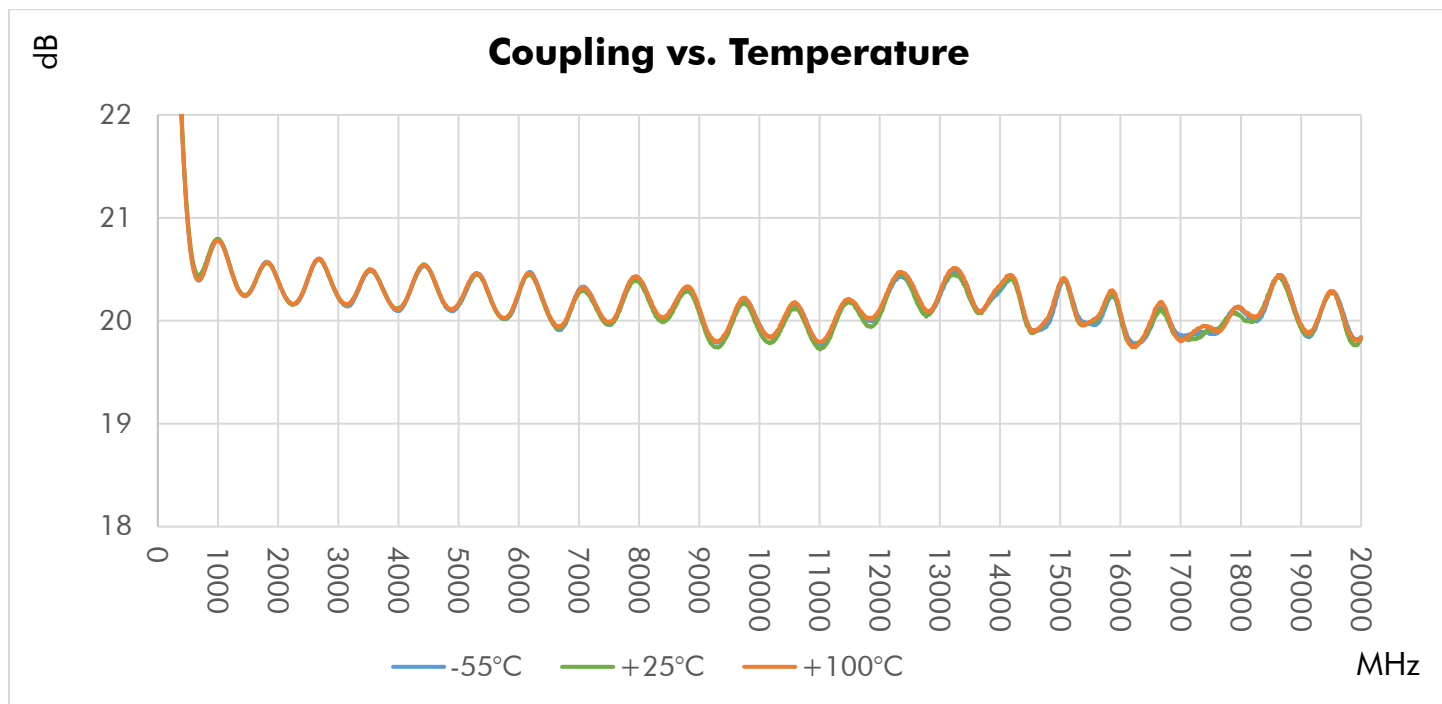


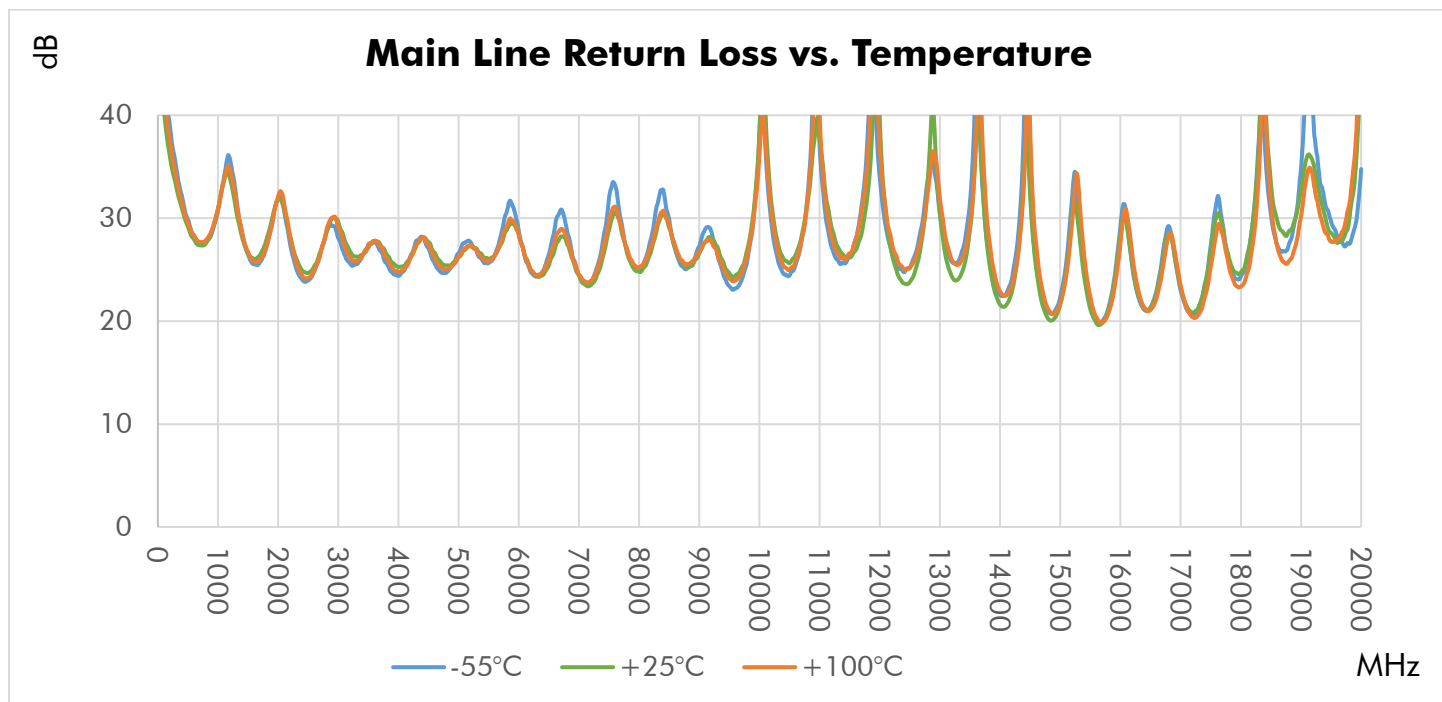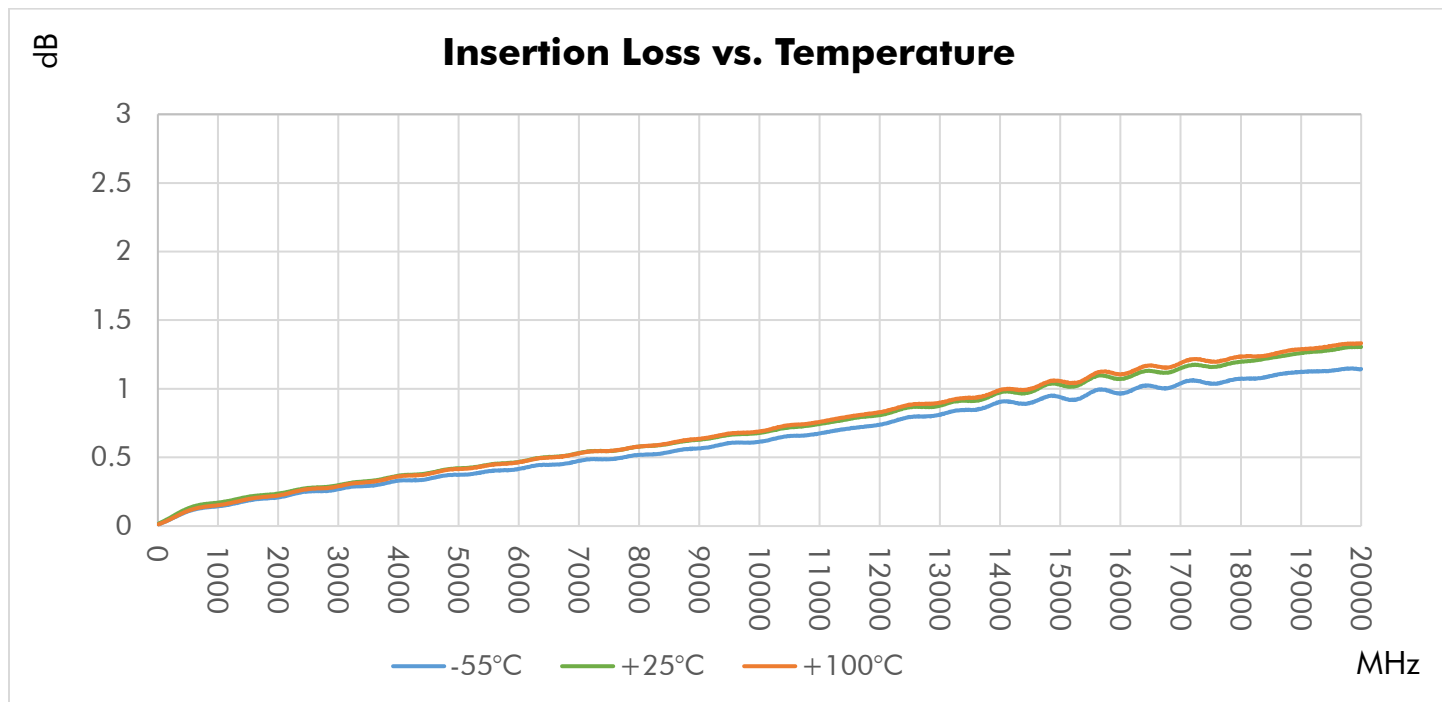

Typical Performance Data

Frequency (MHz)	Return Loss (dB)			Mainline Loss (dB)	Coupling (dB)	Directivity (dB)
	In	Out	Cpl.	In-Out	In-Cpl.	
500	27.6	27.9	26.8	0.2	19.8	32.8
1000	33.5	34.0	30.7	0.2	19.9	30.4
1500	27.0	27.3	27.9	0.2	19.3	35.3
2000	31.0	31.1	28.5	0.3	19.6	30.3
2500	28.1	27.8	27.4	0.3	19.5	33.4
3000	26.0	26.1	26.9	0.3	19.3	28.6
3500	26.5	26.7	27.0	0.4	19.7	27.4
4000	24.0	23.7	26.2	0.4	19.4	27.7
4500	39.0	39.4	42.7	0.4	19.8	28.2
5000	22.8	22.5	24.7	0.4	19.3	26.6
5500	29.5	29.2	32.8	0.5	19.5	30.5
6000	27.4	27.6	39.5	0.5	19.2	27.9
6500	24.5	23.8	25.3	0.5	19.3	30.7
7000	35.5	36.5	29.5	0.5	19.6	26.1
7500	26.2	25.9	35.0	0.6	19.1	25.9
8000	28.7	26.6	24.7	0.6	19.7	25.5
8500	42.6	38.3	32.6	0.6	19.1	27.5
9000	29.3	28.7	32.6	0.7	19.6	30.2
9500	42.6	35.2	32.1	0.7	19.2	28.0
10000	32.5	35.8	28.1	0.7	19.6	24.7
10500	27.9	27.8	29.9	0.7	19.4	28.9
11000	38.8	32.9	28.4	0.8	19.3	22.7
11500	23.5	24.0	23.6	0.8	19.6	27.5
12000	25.4	24.4	29.4	0.8	19.4	22.9
12500	24.1	24.5	19.6	0.8	19.9	24.0
13000	21.5	22.0	21.5	0.9	19.3	23.1
13500	55.9	32.2	23.2	0.9	19.7	23.2
14000	21.5	21.6	21.0	0.9	19.4	23.0
14500	24.5	24.7	21.1	0.9	19.6	35.3
15000	28.7	26.2	19.9	0.9	19.5	28.7
15500	21.1	21.2	25.6	1.0	19.4	19.3
16000	30.6	25.8	19.3	1.0	19.6	14.5
16500	24.7	23.2	22.0	1.1	19.1	15.5
17000	23.7	23.9	21.8	1.1	19.5	18.6
17500	29.9	24.6	26.1	1.1	19.1	25.7
18000	24.5	24.4	22.8	1.1	19.4	21.0
18500	25.1	26.0	24.6	1.1	19.4	18.9
19000	29.6	23.9	25.0	1.2	19.3	31.0
19500	22.2	22.8	22.7	1.2	19.6	16.1
20000	23.2	24.3	19.2	1.2	19.4	29.7

Outline Dimensions

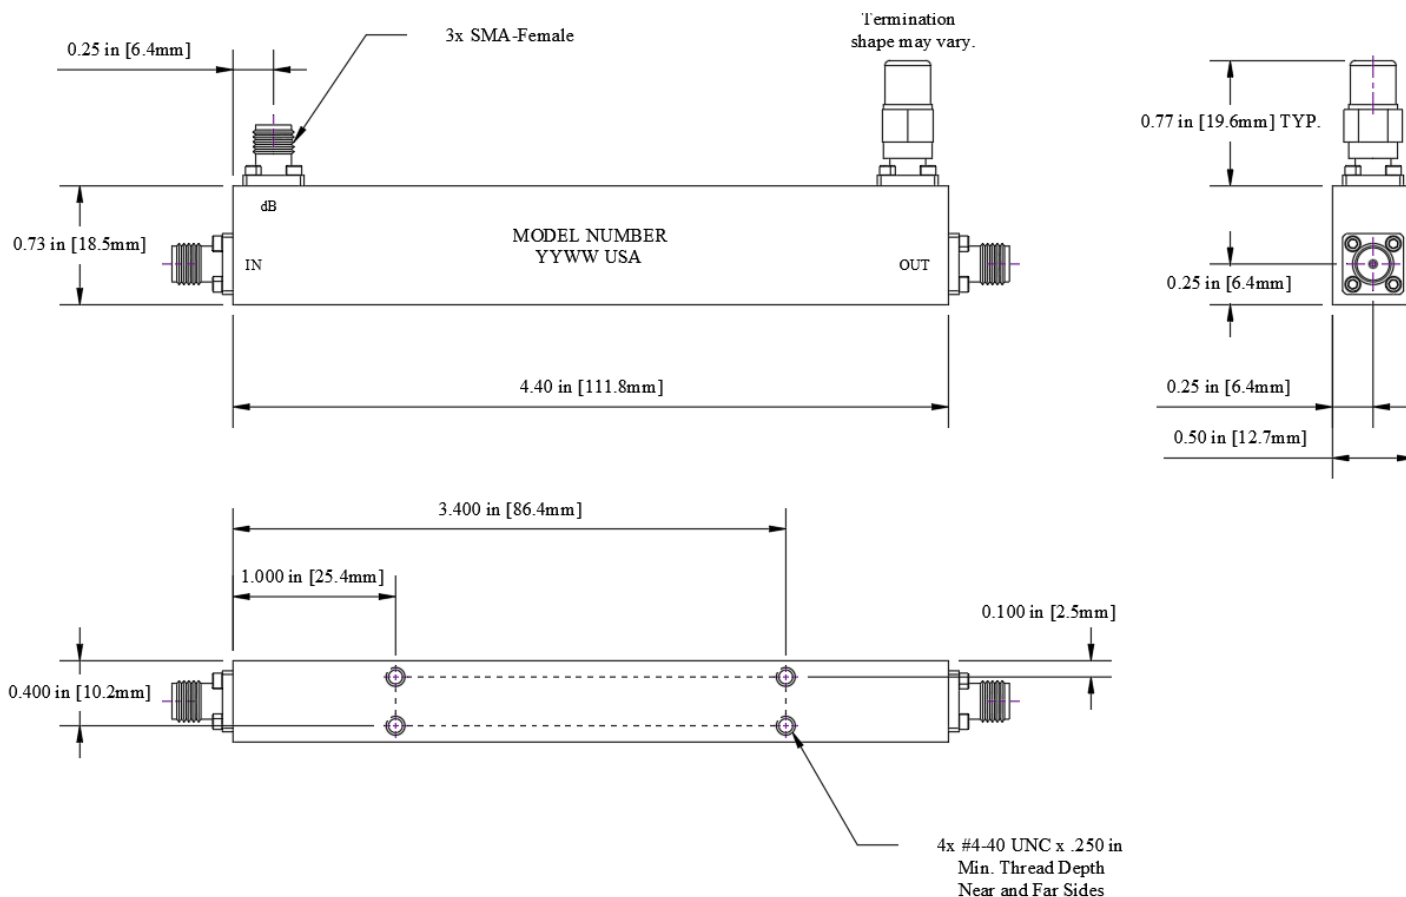

Outline # OL-1185

Dimensions are in inches, [mm] shown for convenience.

Tolerances on 2-pl decimals: $\pm .03$. 3-pl decimals: $\pm .015$.

The information contained in this document is accurate to the best of our knowledge and representative of the product described herein at the date of publication. It may be necessary to make modifications to the product and/or documentation of the product. Werbel Microwave LLC reserves the right to make such changes as required without notice. Unless otherwise stated, all specifications and dimensions are nominal. Werbel Microwave LLC does not make any representation or warranty regarding the suitability of the product described herein for any particular purpose or application, and Werbel Microwave LLC does not assume any liability arising out of the use of any part of documentation. This document gives only a description of the product(s) and shall not form part of any contract. Please contact a Werbel Microwave LLC Applications Engineer for the most current specification drawing.

Reliability testing was performed as an internal requalification of the product to substantiate the published specifications, which were previously arrived at by calculation and/or similarity to existing products. The results of these tests are provided as a courtesy and shall not form part of a contract or warranty. While reliability tests may depict the product being tested beyond the published specification ratings for the purpose of stress testing the product, this does not imply that the product should be operating above the rated limits for any length of time. Specifications related to reliability (e.g., performance over temperature, power handling, DC current, HI-POT) are "designed to meet" and are not individually tested in production of commercially available products. Please contact a Werbel Microwave LLC Applications Engineer if specific reliability testing is needed on a particular product.