



DATASHEET

axE2-2400



Wi-Fi 6

IEEE 802.11 b/g/n/ac/ax
2x2 MU-MIMO
MiniPCle Radio Module



High Performance

30 dBm TX Power
2412 MHz to 2484 MHz



Industrial grade

-40 deg C to +85 deg C
operation temperature

dun & bradstreet



VIZMONET PTE LTD

21 Woodlands Close, #03-01, Primz Biz Hub, Singapore 737 854
+65 6255 0581 | enquiry@vizmonet.com | <https://vizmonet.com>

HW REV# axE22400.0100
Last updated on Apr-28-2024


CUSTOM DESIGN (Options)

Heatsink, Shield Cover and Mechanical Parts

Talk to our experts



enquiry@vizmonet.com

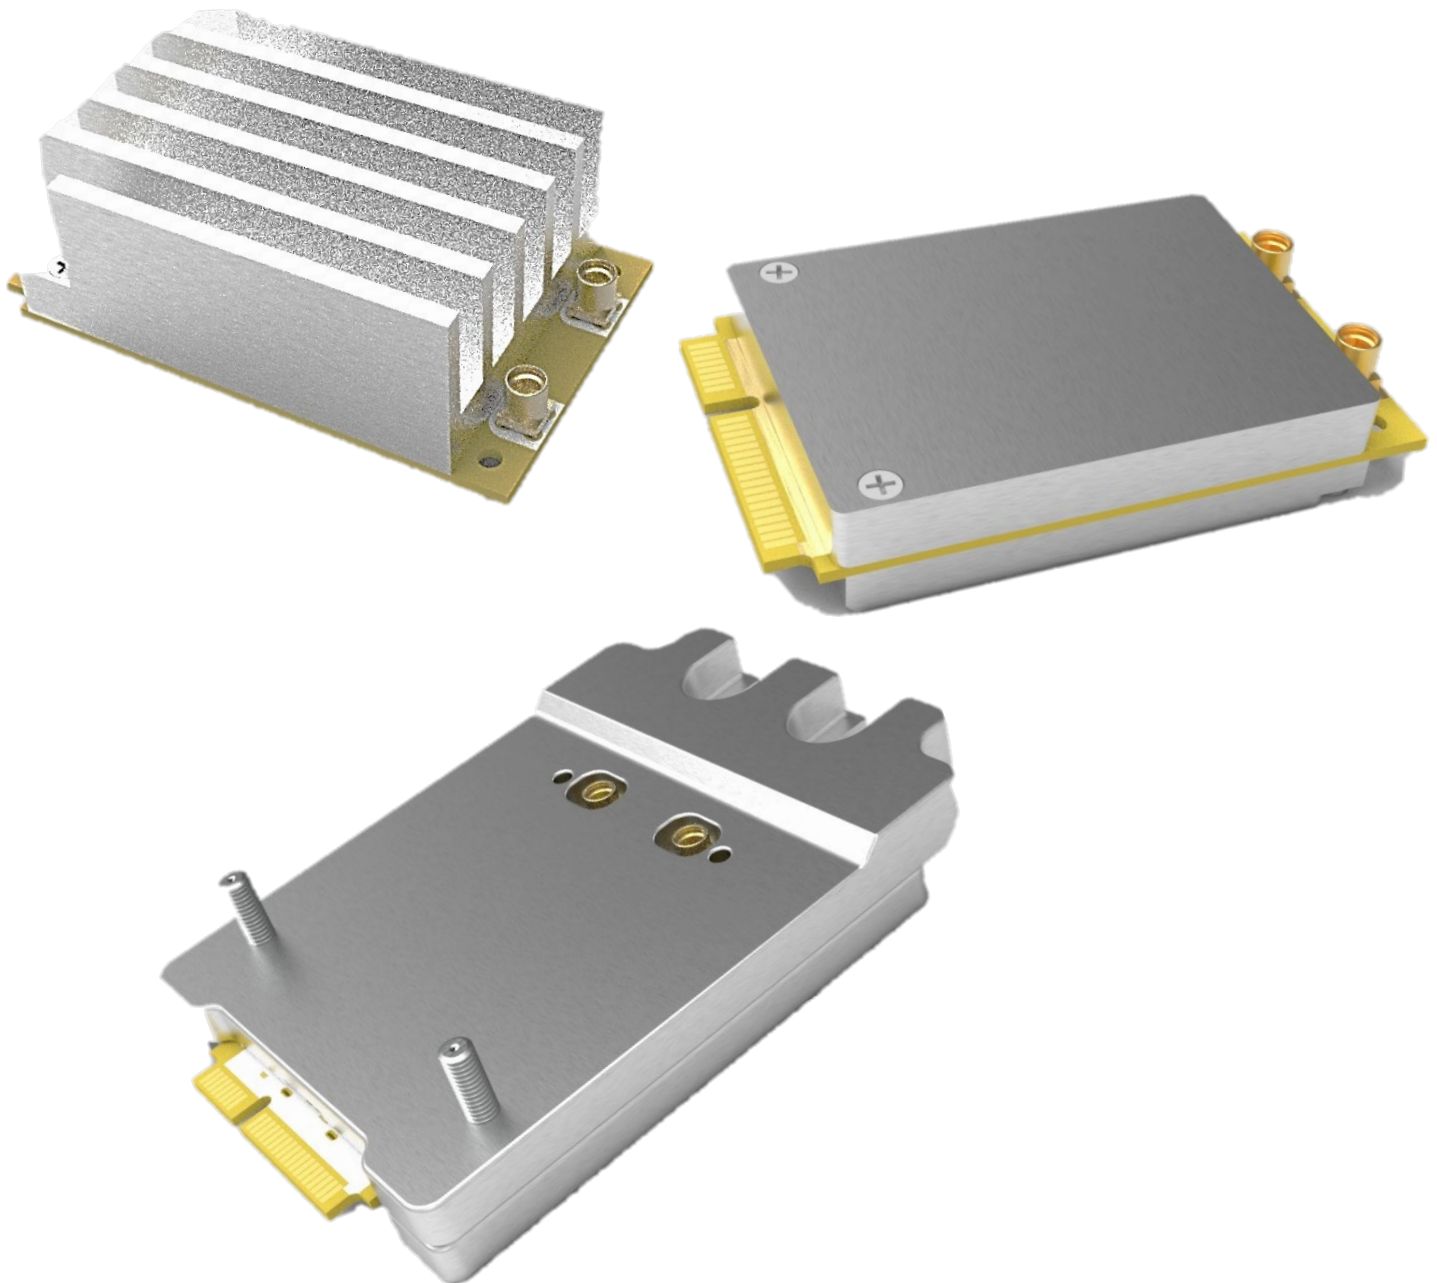

TECHNICAL SPECIFICATION

RADIO MODULE – GENERAL INFO	
Chipset	QUALCOMM QCN-9074-1
EEPROM	2-Mbit serial I ² C bus EEPROM
Host Interface	Mini PCIe interface with PCIe 3.0
Operating System	Linux, supports open source ath11K Linux driver
Security	AES-CCMP at 128/256 bits AES-GCMP at 128/256 bits WEP, TKIP hardware encryption WAPI-2 hardware encryption WPA/WPA2-Personal/WPA2-Enterprise and WPA3 Personal
Operating frequency (11b/g/n)	2412 MHz to 2484 MHz (Operating channels)
Data rate -11b	1 Mbps, 2 Mbps, 5.5 Mbps, 11 Mbps
Data rate-11g	6Mbps, 9Mbps, 12Mbps, 18 Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data rate-11n	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7
Data rate-11ac	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7 ,MCS8, MCS9,
Data rate-11ax	MCS10, MCS11 MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7 ,MCS8, MCS9, MCS10, MCS11, MCS12, MCS13
Channel BW	5 MHz/10 MHz/20 MHz/40 MHz
Compliance	RoHS, MIL-STD-810G Shock & Vibration
MAC ID	74E277 Series
INTERFACE SPECIFICATIONS	
Operating Voltage	3.3V DC / 5V DC (through miniPCI pins 45,47,49,51 for PA)
Total DC Power Consumption	7 Watts in 2x2 MIMO mode
RF Antenna connector	x2 MMCX Female(Jack), Straight connectors
ENVIRONMENTAL SPECIFICATIONS	
Operating Temperature Range	-40 deg C to +85 deg C
PHYSICAL SPECIFICATIONS	
Mechanical Dimension	(L) 51 mm x (W) 30 mm x (H) 21 mm
Weight (grams)	45
REGULATORY INFORMATION	
Compliance	Work in Progress
PACKAGING INFORMATION	
No of units	100, Shipping Carton Dimension (52 cm x 23 cm x 13 cm)

ORDERING INFORMATION

axE2-2400

Mini PCIe Radio Module, 2x2 MU-MIMO, IEEE 802.11 b/g/n/ac/ax, 2.4 GHz
30 dBm

RADIO SPECIFICATION

TX/RX Specification (11b/g) – 2412 MHz to 2462 MHz

TX Power per chain (SISO mode), ± 2 dBm.

DC power consumption is the total dc power drawn only by the miniPCIe module in 2x2 MIMO mode and it excludes the dc power drawn by the main board to which the module is connected.

RX Sensitivity per chain (SISO mode) , ± 2 dBm.

Data Rate	Modulation	TX Power (dBm)	DC Power Consumption (Watts)	RX Sensitivity (dBm)
1 Mbps	DBPSK	27	7.0	-100
2 Mbps	DQPSK	27	7.0	-97
5.5 Mbps	QPSK	27	7.0	-95
11 Mbps	QPSK	27	7.0	-91
6 Mbps	BPSK	27	7.0	-96
9 Mbps	BPSK	27	7.0	-94
12 Mbps	QPSK	27	7.0	-93
18 Mbps	QPSK	27	7.0	-91
24 Mbps	16-QAM	24	6.1	-86
36 Mbps	16-QAM	24	6.1	-83
48 Mbps	64-QAM	24	6.1	-80
54 Mbps	64-QAM	24	6.1	-78

TX/RX Specification (11n) – 2412 MHz to 2462 MHz

TX Power per chain (SISO mode), ± 2 dBm.

DC power consumption is the total dc power drawn only by the miniPCle module in 2x2 MIMO mode and it excludes the dc power drawn by the main board to which the module is connected.

RX Sensitivity per chain (SISO mode), ± 2 dBm.

Data Rate	Modulation	TX Power (dBm)	DC Power Consumption (Watts)	RX Sensitivity (dBm)
HT20-MCS0	BPSK	27	7.0	-94
HT20-MCS1	QPSK	27	7.0	-90
HT20-MCS2	QPSK	27	7.0	-88
HT20-MCS3	16-QAM	27	7.0	-85
HT20-MCS4	16-QAM	24	6.1	-81
HT20-MCS5	64-QAM	24	6.1	-77
HT20-MCS6	64-QAM	24	6.1	-76
HT20-MCS7	64-QAM	24	6.1	-74
HT40-MCS0	BPSK	27	7.0	-91
HT40-MCS1	QPSK	27	7.0	-87
HT40-MCS2	QPSK	27	7.0	-85
HT40-MCS3	16-QAM	26	6.5	-82
HT40-MCS4	16-QAM	23	5.9	-78
HT40-MCS5	64-QAM	23	5.9	-74
HT40-MCS6	64-QAM	23	5.9	-73
HT40-MCS7	64-QAM	23	5.9	-71

TX/RX Specification (11ac) – 2412 MHz to 2462 MHz

TX Power per chain (SISO mode), ± 2 dBm.

DC power consumption is the total dc power drawn only by the miniPCle module in 2x2 MIMO mode and it excludes the dc power drawn by the main board to which the module is connected.

RX Sensitivity per chain (SISO mode) , ± 2 dBm.

Data Rate	Modulation	TX Power (dBm)	DC Power Consumption (Watts)	RX Sensitivity (dBm)
VHT20-MCS0	BPSK	27	7.0	-96
VHT20-MCS1	QPSK	27	7.0	-94
VHT20-MCS2	QPSK	27	7.0	-92
VHT20-MCS3	16-QAM	27	7.0	-89
VHT20-MCS4	16-QAM	24	6.1	-85
VHT20-MCS5	64-QAM	24	6.1	-81
VHT20-MCS6	64-QAM	24	6.1	-80
VHT20-MCS7	64-QAM	24	6.1	-79
VHT20-MCS8	256-QAM	23	5.9	-74
VHT20-MCS9	256-QAM	23	5.9	-72
VHT20-MCS10	1024-QAM	22	5.8	-69
VHT20-MCS11	1024-QAM	22	5.8	-67
VHT40-MCS0	BPSK	27	7.0	-93
VHT40-MCS1	QPSK	27	7.0	-91
VHT40-MCS2	QPSK	27	7.0	-89
VHT40-MCS3	16-QAM	26	6.5	-86
VHT40-MCS4	16-QAM	23	5.9	-82
VHT40-MCS5	64-QAM	23	5.9	-78
VHT40-MCS6	64-QAM	23	5.9	-77
VHT40-MCS7	64-QAM	23	5.9	-76
VHT40-MCS8	256-QAM	23	5.9	-71
VHT40-MCS9	256-QAM	23	5.9	-69
VHT40-MCS10	1024-QAM	22	5.8	-66
VHT40-MCS11	1024-QAM	21	5.7	-64

TX/RX Specification (11ax) – 2412 MHz to 2462 MHz

TX Power per chain (SISO mode), ± 2 dBm.

DC power consumption is the total dc power drawn only by the miniPCle module in 2x2 MIMO mode and it excludes the dc power drawn by the main board to which the module is connected.

RX Sensitivity per chain (SISO mode), ± 2 dBm.

Data Rate	Modulation	TX Power (dBm)	DC Power Consumption (Watts)	RX Sensitivity (dBm)
HE20-MCS0	BPSK	27	7.0	-94
HE20-MCS1	QPSK	27	7.0	-93
HE20-MCS2	QPSK	27	7.0	-91
HE20-MCS3	16-QAM	26	6.5	-89
HE20-MCS4	16-QAM	24	6.1	-85
HE20-MCS5	64-QAM	24	6.1	-81
HE20-MCS6	64-QAM	24	6.1	-80
HE20-MCS7	64-QAM	24	6.1	-78
HE20-MCS8	256-QAM	22	5.8	-75
HE20-MCS9	256-QAM	22	5.8	-73
HE20-MCS10	1024-QAM	21	5.7	-70
HE20-MCS11	1024-QAM	21	5.7	-67
HE20-MCS12	4096-QAM	20	5.5	-64
HE20-MCS13	4096-QAM	20	5.5	-60
HE40-MCS0	BPSK	27	7.0	-91
HE40-MCS1	QPSK	27	7.0	-90
HE40-MCS2	QPSK	27	7.0	-88
HE40-MCS3	16-QAM	26	6.5	-86
HE40-MCS4	16-QAM	24	6.1	-82
HE40-MCS5	64-QAM	24	6.1	-78
HE40-MCS6	64-QAM	24	6.1	-77
HE40-MCS7	64-QAM	24	6.1	-75
HE40-MCS8	256-QAM	22	5.8	-72
HE40-MCS9	256-QAM	22	5.8	-70
HE40-MCS10	1024-QAM	21	5.7	-67
HE40-MCS11	1024-QAM	20	5.5	-64
HE40-MCS12	4096-QAM	20	5.5	-61
HE40-MCS13	4096-QAM	20	5.5	-57

TX Specification


Parameter	Specification
RF Power control Step	0.5 dBm
Spectral Mask Compliance	Compliant with IEEE 802.11b/g/n/ac/ax Mask, with > 5 dB margin
EVM Compliance	Compliant with IEEE 802.11b/g/n/ac/ax EVM requirement with > 5 dB margin
Second Harmonic Spurious Emission	-30 dBC
Third Harmonic Spurious Emission	-40 dBC
Transmitter Spurious Emission	FCC PART 15C COMPLIANT

RX Specification

Parameter	Specification
Receiver Maximum input level (10% PER)	
11b, 11g < 18 Mbps, 11n/11ac/11ax < MCS5	> 2 dBm
11b, 11g > 18 Mbps, 11n/11ac/11ax > MCS5	> -10 dBm
Frequency Accuracy	Within ± 10 PPM
Receiver Adjacent Channel Rejection (ACR)	
11g, 6 Mbps	> 25 dBC
11ac, 11ax, HE40-MCS0	> 30 dBC
11ax, HE40-MCS11	> 11 dBC
Interference De-sensitization 11ax, HE20-MCS13	
400 MHz to 2350 MHz	> 50 dBC
4800 MHz to 5825 MHz	> 60 dBC


TX EVM PERFORMANCE

Frequency = 2432 MHz, TX Power=21 dBm, IEEE 802.11ax, HE20, MCS11

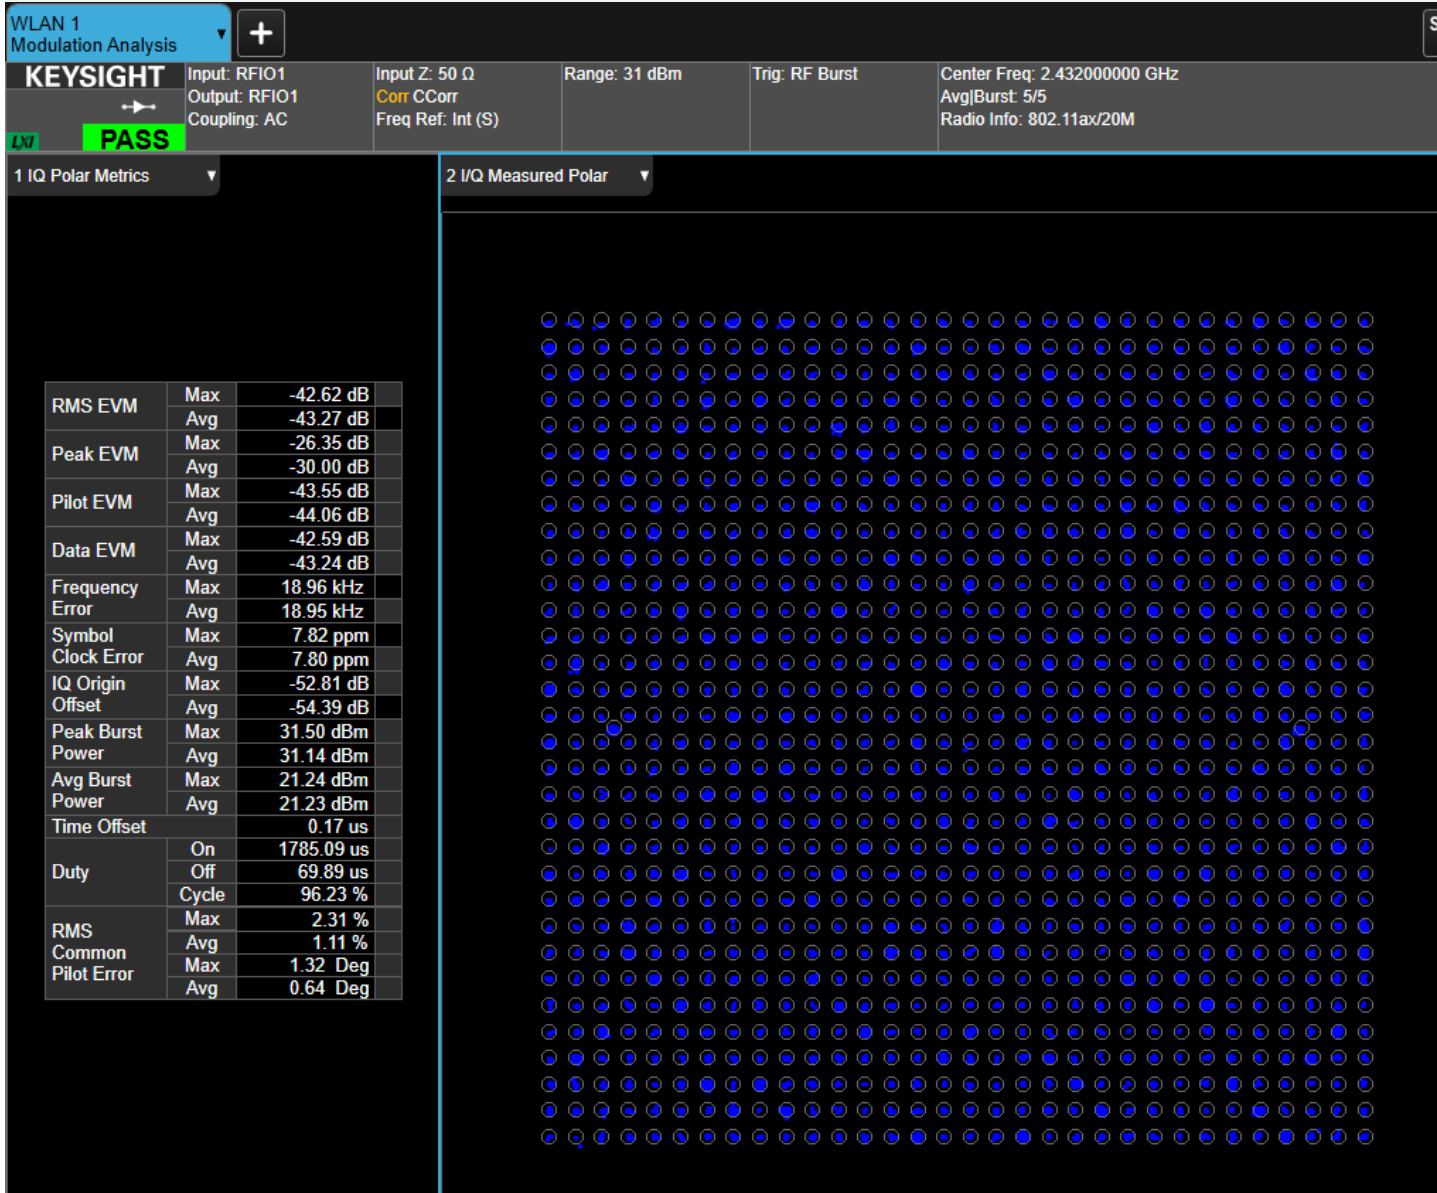


TX EVM PERFORMANCE


Frequency = 2432 MHz, TX Power = 22 dBm, IEEE 802.11ac, VHT20, MCS11

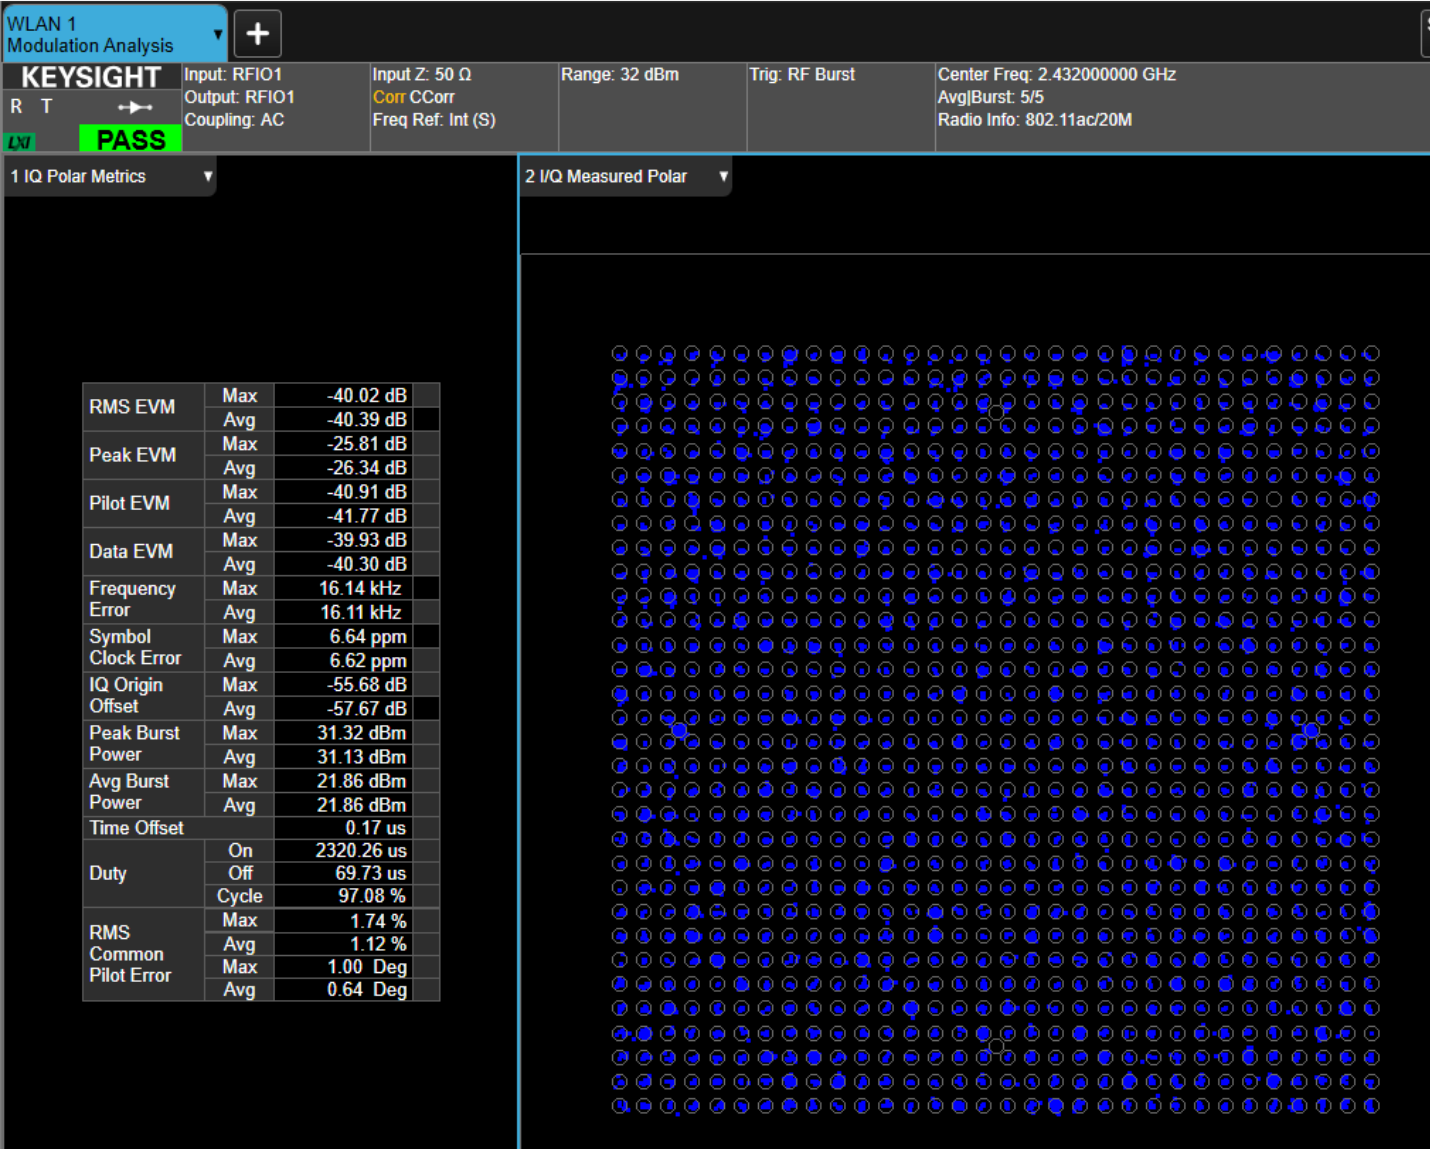

Interference Desensitization

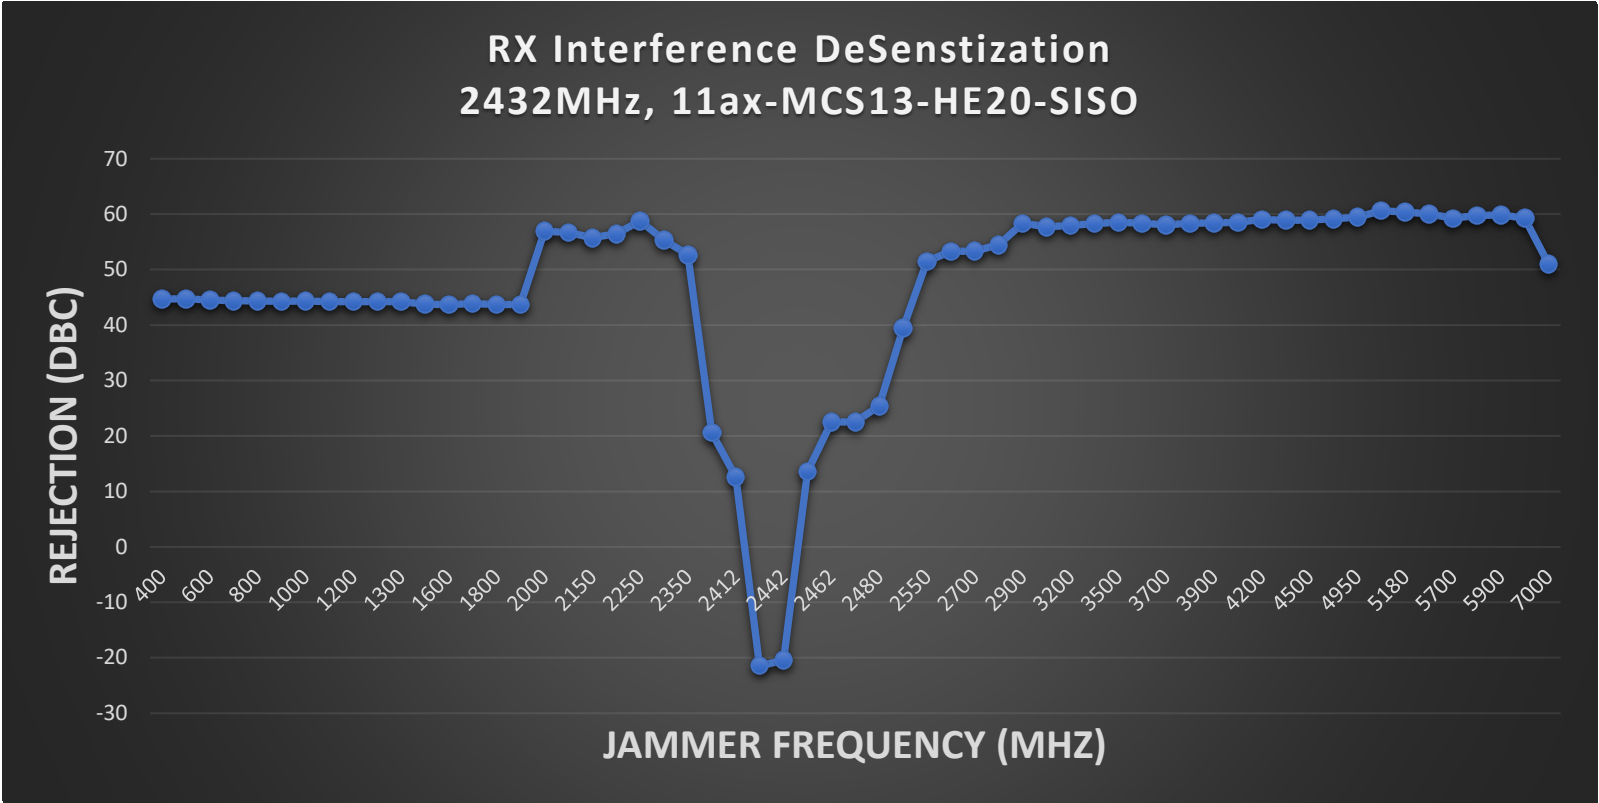






Receiver Dynamic Range

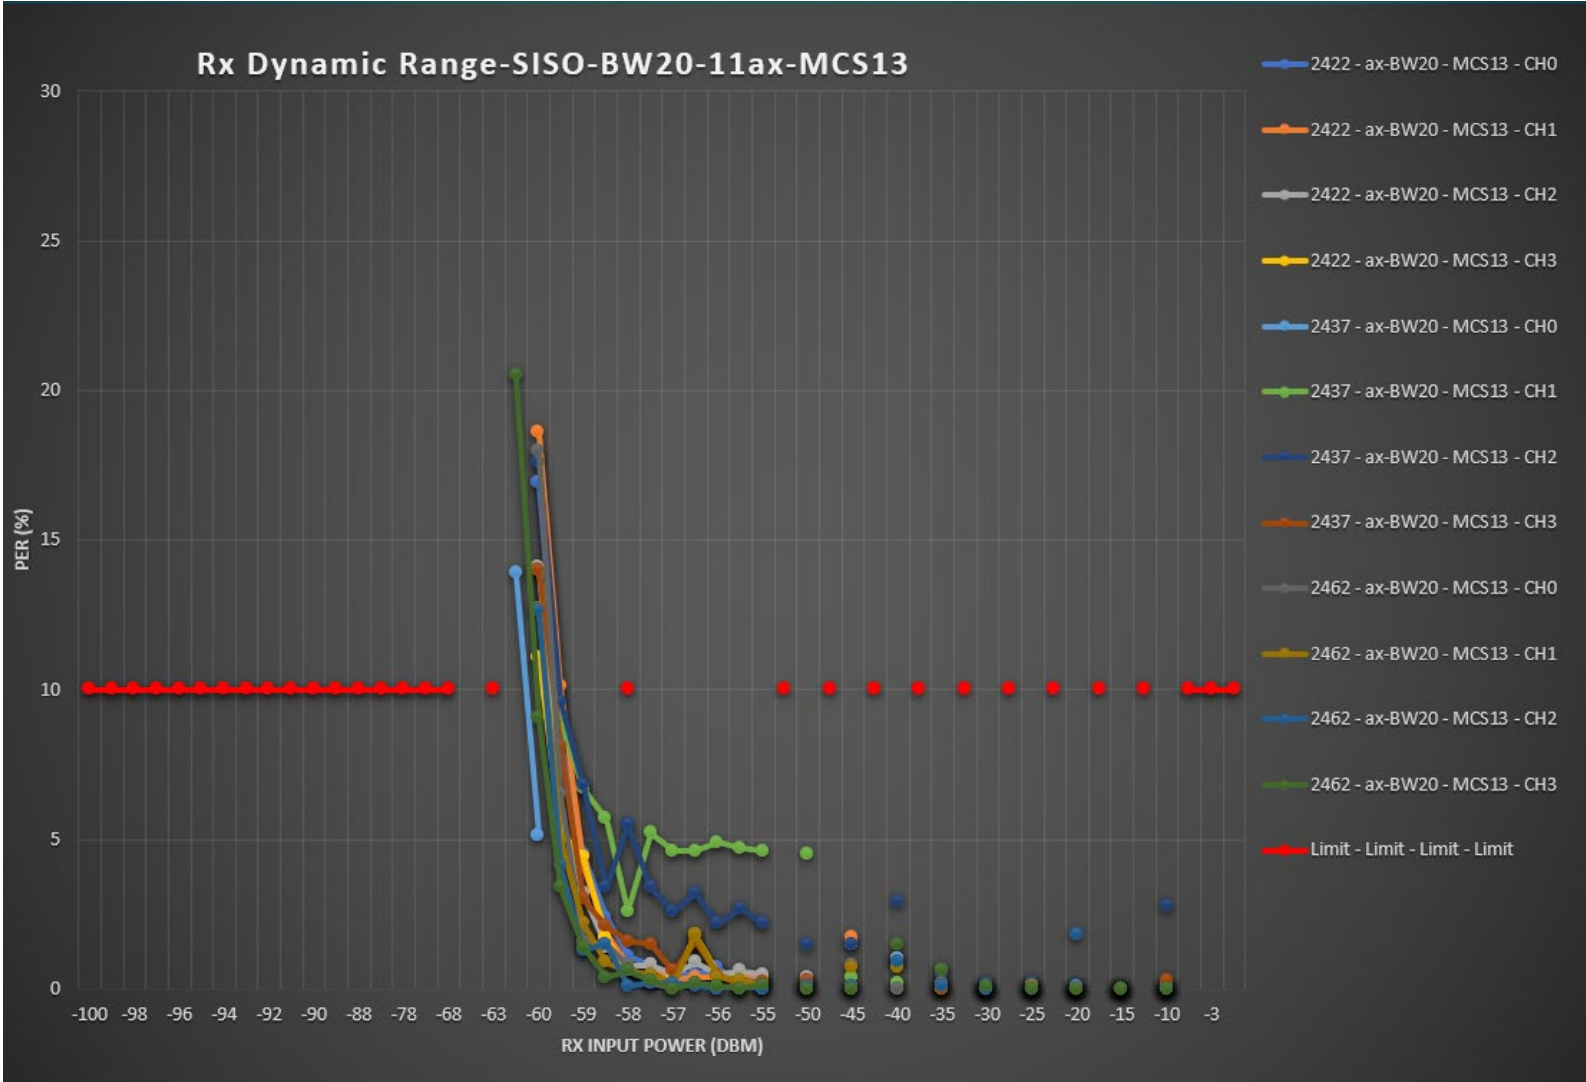

MINIPCIE (GOLD FINGER) PIN-OUT

Pin#	Description
1	WAKE_L
2	3.3V
3	RESERVED (NC)
5	RESERVED (NC)
6	1.5V (NC)
7	CLKREQ_L, connected to GND through a pull-down resistor of 0 Ohms.
8	UIM_PWR (NC)
10	UIM_DATA (NC)
11	REFCLK-
12	UIM-CLK (NC)
13	REFCLK+
14	UIM-RESET (NC)
16	UIM_VPP (NC)
17	UIM_C8 (NC)
19	UIM_C4 (NC)
20	W_DISABLE_L (Pulled up to 3.3V)
22	RESET
23	PERN0
24	3.3VAUX (NC)
25	PERP0
28	1.5V (NC)
30	SMB_CLK (NC)
31	PETN0
32	SMB_DATA(NC)
33	PETP0
36	USB_D- (NC)
37	RESERVED (NC)
38	USB_D+ (NC)
39	3.3V
41	3.3V
42	LED_WWAN_L (NC)
44	LED_WLAN_L (NC)
45	5V (FOR PA)
46	LED_WPAN_L (NC)
47	5V (FOR PA)
48	1.5V (NC)
49	5V (FOR PA)
51	5V (FOR PA)
52	3.3V
4,9,15,18,21,26,27,29,34,35,40,43,50	GND

NC- NO CONNECTION

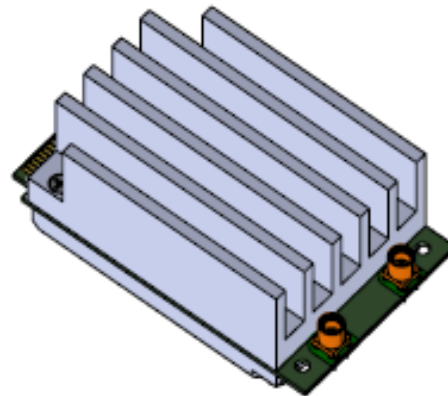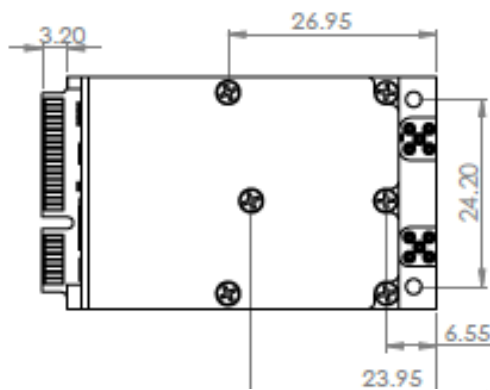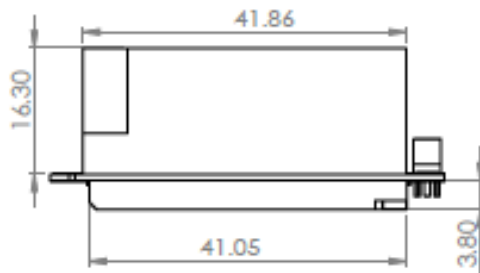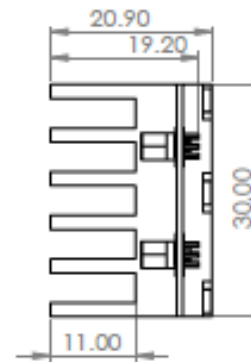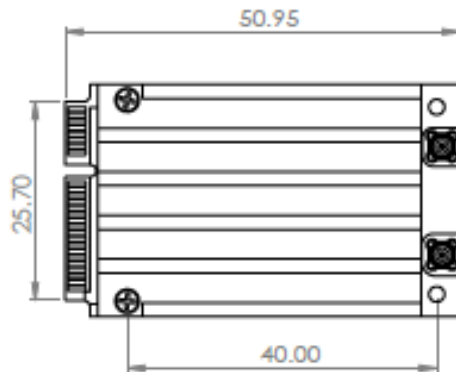MECHANICAL DIMENSIONS**Trademarks**

The information in this document is being provided in connection with Vizmonet products, which are subject to continuous developments and improvements. While every effort is made to ensure that the information contained in this document is correct and accurate at the time of this printing, Vizmonet makes no representations or warranties with respect to the accuracy of the information and is not liable for errors or mistakes that may arise. However, Vizmonet reserves the right to make changes to specifications and product descriptions at any time without notice. Vizmonet does not assume any responsibility for the use of the described product; neither does it convey any license under its patent rights, or the rights of others. Vizmonet products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life. Built-to-Customize™ is a trademark of Vizmonet. All other trademarks, registered trademarks and product names are the sole property of their respective owners.

Contact

Web: <https://vizmonet.com>
Email: enquiry@vizmonet.com

Headquarters

Vizmonet Pte Ltd
21, Woodlands Close
#03-01, Primz Biz Hub
Singapore 737 854