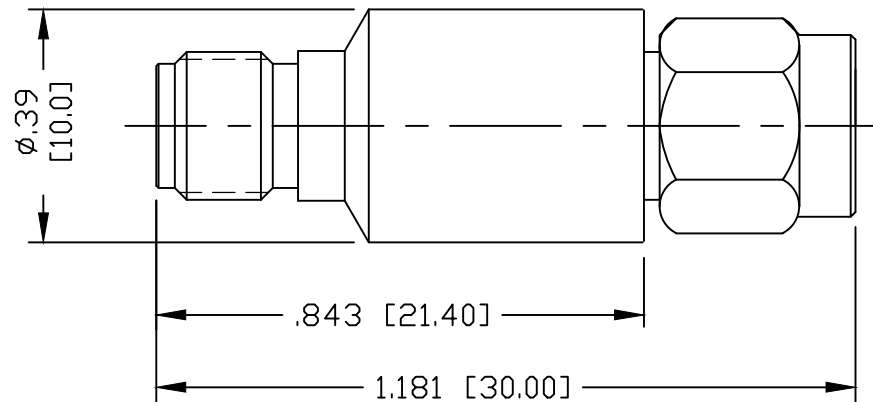


PART NO.

RF-ATN-SMF-5W10

REV	DESCRIPTION	DWN	DATE	APPROVED
—	ENGINEERING RELEASE	CZS	10/10/18	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 0–3 GHz
 POWER: 5 WATT (AVERAGE)
 VSWR MAX: $\leq 1.2:1$
 ATTENUATION: 10dB
 ACCURACY: ± 1.0 dB
 OPERATING TEMPERATURE: -30°C TO $+65^{\circ}\text{C}$

NOTES:

ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING ALL DIMENSIONS ARE REFERENCE ONLY UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		RoHS COMPLIANT PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.		RFconnectors 7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX	
DRAWN C. ZUNIGA 10/10/18 CHECKED ORJ DRAWN C. ZUNIGA 10/10/18		5 WATT ATTENUATOR SMA MALE TO SMA FEMALE 10dB			
SIZE A SCALE: NTS		CABLE GROUP ENGINEERING ID: 000000		DWG NO. RF-ATN-SMF-5W10 SHEET 1 OF 1	
				REVISION —	